



# PALLET RACKING ALFA






The entire range of EAB store fittings is manufactured in our factory at Smålandsstenar. This enables us to offer quick and punctual deliveries. We have developed a high level of know-how in warehouse logistics after many years in the field.

EAB Built to last.

Durability is a distinguishing characteristic of EAB. Our attention to detail and quality thinking are part of everything we do from selecting material to manufacturing, delivery and assembly. Durability also includes the relationships we have with our customers, suppliers and employees.



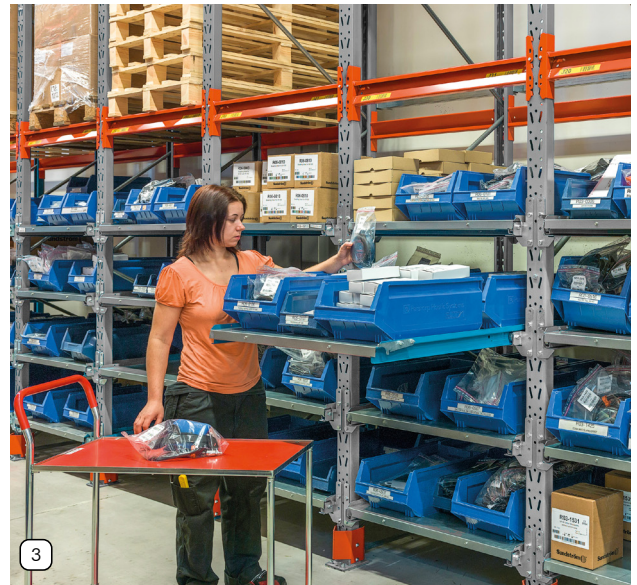

1. Pallet racking – with drawer unit

2. Pallet racking – for stacker crane system

3. Pallet racking – with slide out unit

4. Pallet racking – high rise for VNA system.



## ACCESSORIES



**Frame protector** - for end frame, uprights and truck aisle. For both single and double racking. Height 400 mm.



**Upright protector** - for floor mounting height 400 mm.



**Upright reinforce low 90/110** - to be fitted together with the sleeve footplate. Provides excellent protection for the upright frame member, without taking up extra space height 150 mm.



**Upright reinforce high 90/110** - to be fitted with the sleeve footplate. Provides the best possible protection for the most exposed part of the frame height 760 mm.



**Shelf panels** - for picking goods without pallet. Width 455 mm.



**Mesh shelves** - for picking goods with or without pallet, approved for premises with sprinkler system. Excellent protection against falling goods beside truck aisles. Width 910 mm.



**Pallet stop vertical** - prevent pallets from being placed too far in.



**Pallet stop horizontal** - fitted to rear of frame to prevent pallets from being placed too far in.



**Anti collapse system** - fitted to rear side, to prevent goods from falling down behind the racks.



**Pallet support bars** - for longside handling pallets.



**Pallet support bars** - for half pallet. Makes possible storage of odd-sized pallets after rearranging intermediate beams.




**Load capacity notice** - indicates permitted loadings per section depending upon the placing of the bearing surface. For mounting in prominent position.




## ACCESORIES



**Standard footplate**

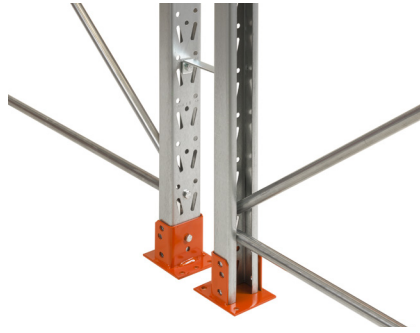

**Frame spacer** - used in double racks.

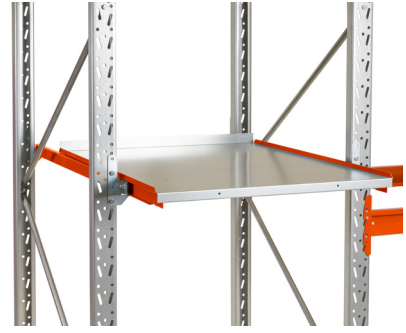

**Slide-out shelf** - for picking goods without pallet.  
Max load 300 kg.

**Sleeve footplate**




**Slide-out unit for pallet** - fitted on beams. Achieves best ergonomics in handling. Max load 700 kg



**Slide-out unit for pallet** - fitted on floor. Max load 700 kg.



**Slide-out unit for pallet** - with extension set for stacker truck. Max load 700 kg.

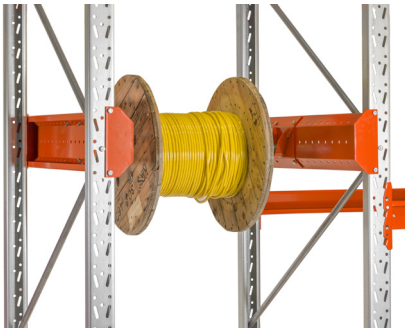

**Cable dispensing unit** - with self-locking axle. Adjustable drum mounting and movable axle location.



**Equipment rack** - for end-frame. Practical rack for assorted items.



**Frame shelf**



**Beam divider** - divides flat decked goods.



**Beam divider** - divides standing long items.



**Fork entry bars** - for your flat decked goods.





## Facts

EAB's pallet racking Alfa are based on a tried and tested design, where safety and performance is a primary. The entire rack incorporates only two components – frames and beams. Stability is provided by the framework.

### Safety requirements

EAB's pallet racking fulfil the new European Standards, SS-EN 15512, SS-EN 15620, SS-EN 15629, and SS-EN 15635.

### Surface finish

Frames are galvanized; beams and accessories are powder coated in orange colour.

### Delivery

Frames are delivered complete with horizontal and diagonal bracing, foot-plates and nuts and bolts. The instructions which accompany every delivery make assembly and mounting a simple matter. Beams are supplied complete with safety lockings. A loading notice is also supplied with all deliveries. This should be mounted in a prominent position.



TECHNICAL DETAILS	PALLET RACKING ALFA	
	DIMENSIONS	LOADINGS
A Frame, height	1500 - 8000 mm	
B Frame, depth	500, 800, 1100 mm	
C Upright, width	90 mm	8000 kg, 12000 kg
Upright, width	110 mm	14000 kg, 18000 kg
Frame spacer	100, 150, 200, 250, 300, 400 mm	
D Beam, length/height	950 mm / Z100 mm	1x1000 kg
(for short side handled pallet)	1850 mm / Z100 mm	2x1000 kg
	2300 mm / Z100 mm	2x1000 kg
	2750 mm / Z100 mm	3x550 kg
	2750 mm / Z115 mm	3x750 kg
	2750 mm / Z140 mm	3x1000 kg
	3600 mm / Z160 mm	4x800 kg
	3600 mm / Z160 mm	4x1000 kg
D Beam, length/height	1350 mm / Z100 mm	1x1000 kg
(for long side handled pallet)	2650 mm / Z115 mm	2x1150 kg

**EAB Warehouse equipment:** Pallet racking, Drive-in racking, Radioshuttle™, Live storage racking, Drawer unit, Cantilever racking, Timber racking, Vertical racking, Modular shelving, Barrier system and Plastic bins.



SE-333 33 SMÅLANDSSTENAR  
TEL +46 371 340 00 www.eab.info



- + Wide range of Standard products
- + Five year guarantee
- + Concept, project management, construction and assembly
- + Tried-and-tested products
- + One project leader = a single contact person throughout the project
- + Production and product development at the same site
- + Extensive experience and solid know-how in steel structures (valuable know-how gained in many warehouse equipping projects)
- + Everything in good time. We ask any questions that arise before making our offer to avoid unnecessary extra costs
- + Our own testing department
- + A long-term approach to business and customer relationships